Kingtec (Group) Co., Ltd,

No.1 Rexking Road, Pearl Development Zone, Heyuan City, Guangdong Province.

China Pearl Development Zone, City, Guangdong Province.












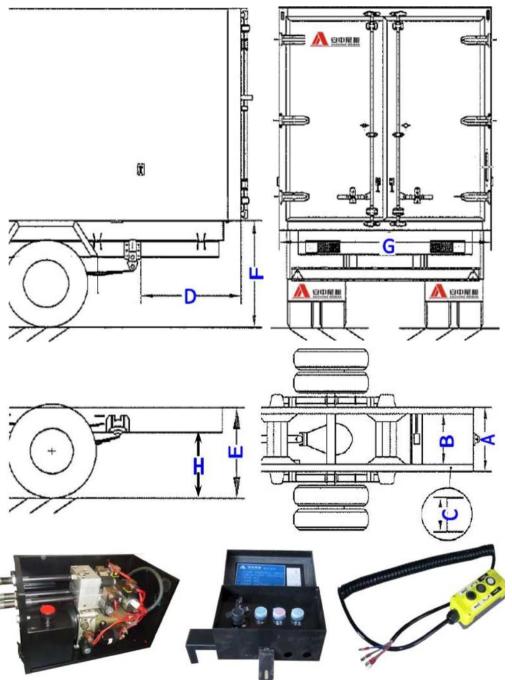





Style YZ-0.5-900
Lifting height
Board size
Lifting cylinder
Tilting cylinder
Powerpack
Control unit
Price

Load capacity 500 kg
900 mm
1550x 1200 mm Steel/Alloy
2pcs Single acting cylinder
1 or 2 pcs Double acting cylinder
Made in China 12V/1.6KW/0.85CC/4L
Control box + Liner control

Requirments for installation


Automobile rear suspension D 1400 mm Width of beam A 780 mm

Height from the beam to floor E 1500 mm

Gross weight: 240 kg(with aluminum board)





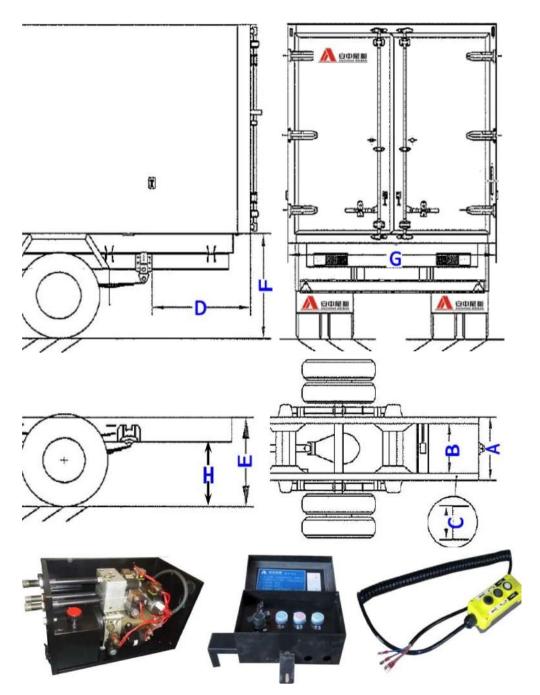





Style YZ-8-1
LiHing height
Board size
Lifting cylinder
Tilting cylinder
Powerpack

Control unit Price :

Load capacity 750 kg

900 mm

1800x1400 mm Steel/Alloy

2pcs Single acting cylinder

2pcs Double acting cylinder

Made in China 12V/1.6KW/0.85CC/4L

Control box + Liner control

Requirments for installation:


Automobile rear suspension D a400 mm Width of beam A :s780 mm

Height from the beam to floor E>500 mm

Gross weight: 260 kg(with aluminum board)





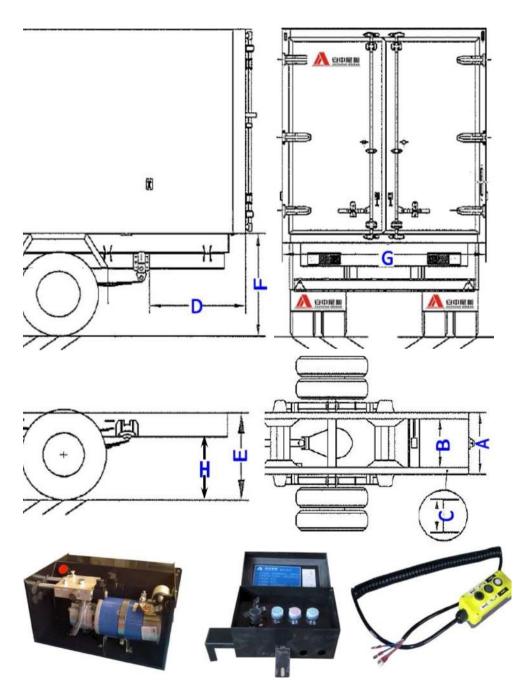





Style: YZ-10-120 Lifting height Board size Lifting cylinder

Lifting cylinder
Tilting cylinder
Powerpack
Control unit

Price

Load capacity: 1000 kg

1200 mm

1800x1700/2000a1700mm Steel/Alloy

2 C5 Single acting cylinder2pcs Single acting cylinder

Sweden technical Haldex Valve

Control box + Liner control

Requirments for installation

Automobile rear suspension D 1760 mm

Height of truck floor F 1200 mm


Width of beam A 760 mm

Height from the beam to floor E 630 mm

Gross weight: 420 kg(with aluminum board)





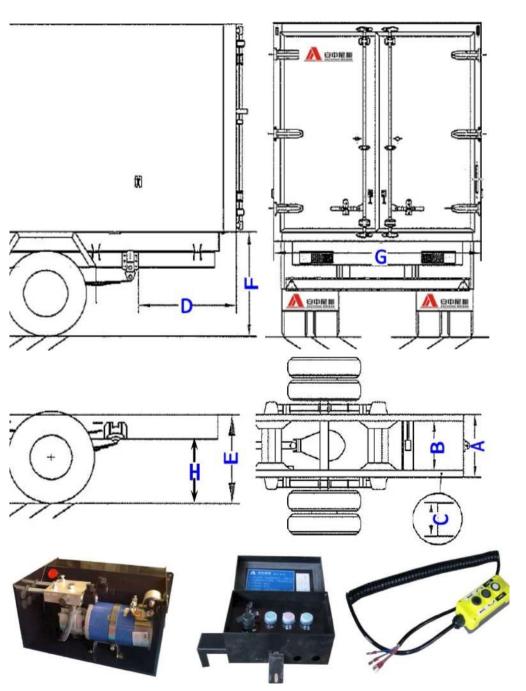



Style: YZ-15-135 Load capacity: 1500 kg

LiHing height 1350 mm

Board size 2200a1800 Steel/Alloy

Lifting cylinder 2pcs Single acting cylinder 2pcs Single acting cylinder

Balance cylinder 1pcs

Powerpack Sweden technical Haldex Valve

Control unit Control box + Liner control

Price

Requirments for installation

Automobile rear suspension

D. 800 mm

Height of truck floor

Width of beam

Height from the beam to floor

D. 800 mm


F <1350 mm

E.z720 mm

Gross weight: 450 kg(with aluminum board)





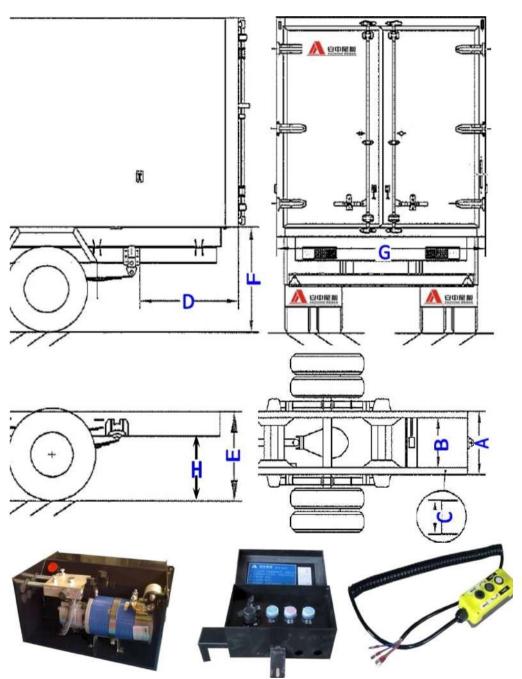





Style: YZ-20-150 Load capacity: 2000 kg

Lifting height 1500 mm

Board size 2300×1800 Steel/Alloy

Lifting cylinder 2pcs Single acting cylinder Tilting cylinder 2pcs Single acting cylinder

Balance cylinder 1pcs

Powerpack

Control unit

Sweden technical Haldex Valve Control box + Liner control

Price "


Requirments for installation:

Automobile rear suspension D >820 mm Height of truck floor 1520 mm Width of beam 880 mm E 1800 mm Height from the beam to floor

460 kg(with aluminum board) Gross weight:





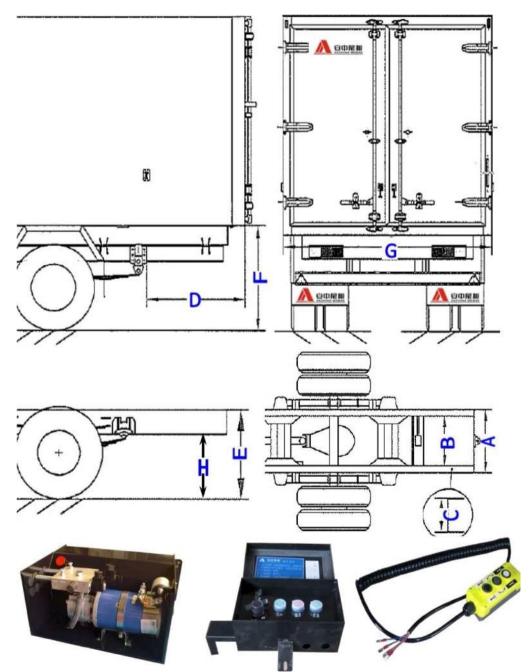



Load capacity: 2500 kg Style: YZ-25-155

LiHing height 1550 mm

2300a 1800 Steel **Board** size

2pcs Single acting cylinder Lifting cylinder 2pcs Single acting cylinder Tilting cylinder 1pcs

Balance cylinder

Sweden technical Haldex Valve Powerpack

Control unit

Price

Control box + Liner control


Requirments for installation

Automobile rear suspension 930 mm Height of truck floor 1550 mm Width of beam A also mm Height from the beam to floor E *800 mm

600 kg(with steel board) Gross weight:





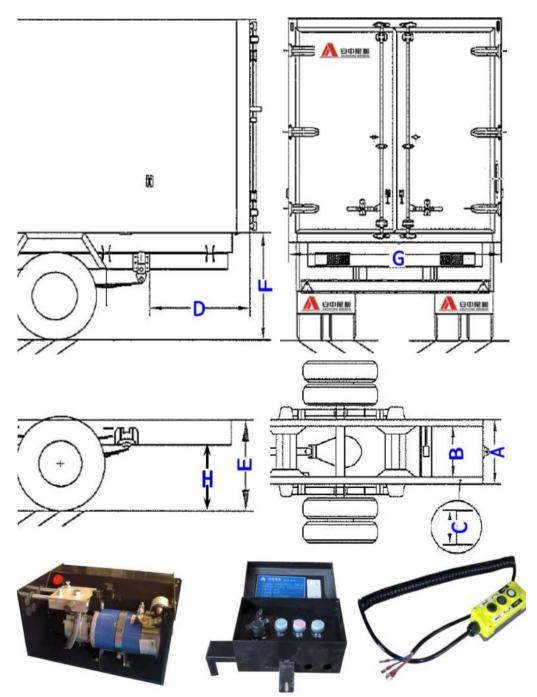





Style: YZ-30-155

Lifting height

Board size

Lifting cylinder Tilting cylinder

Balance cylinder

Powerpack

Control unit

Price:

Load capacity: 3000 kg

1550 mm

2300 1800 Steel

2pcs Sinple acting cylinder 2pcs Single acting cylinder

lpcs

Sweden technical Haldex Valve

Control box + Liner control


Requirments for installation

Automobile rear suspension D 930 mm
Heipht of truck floor F 1550 mm
Width of beam A 880 mm
Height from the beam to floor E 1800 mm

Gross weight: 640 kg(with steel board)





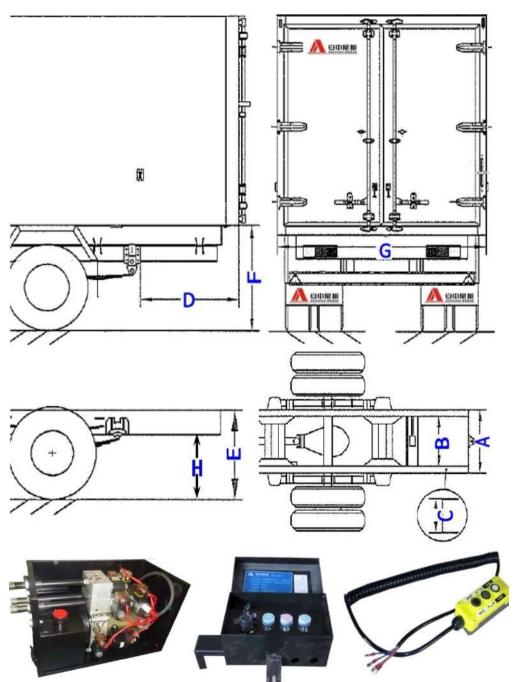





Style YZ-SZ-15-2

Lifting height

Board size

Lifting cylinder

Tilting cylinder

Auto tilt:

Powerpack

Control unit

Price:

Load capacity 1500 kg

1450 mm

2330a1610 alloy, with roll stop

2pcs Single acting cylinder 2pcs single acting cylinder

Machnical

Made in China

Control box + Liner control


Requirments for installation

Automobile rear suspension D 11850 mm
Height of truck floor F s1450 mm
Width of beam A <870 mm
Height from the beam to floor E 1770 mm

Gross weight: 680 kg(with aluminum board)





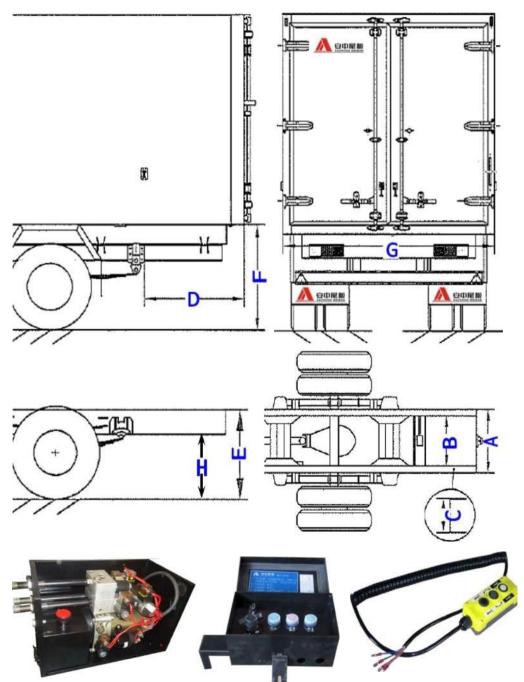





Style: YZ-SZ—20-2

Lifting height

Board size

Lifting cylinder

Tilting cylinder

Auto tilt:

Powerpack

Control unit

Price

Load capacity: 2000 kg

1450 mm

2330a 1610 alloy, with roll stop

2pcs Single acting cylinder 2pcs sinple acting cylinder

Machnical

Made in China

Control box + Liner control


Requirments for installation

Automobile rear suspension D 11850 mm
Height of truck floor F s1450 mm
Width of beam A s870 mm
Height from the beam to floor E z770 mm

Gross weight: 680 kg(with aluminum board)





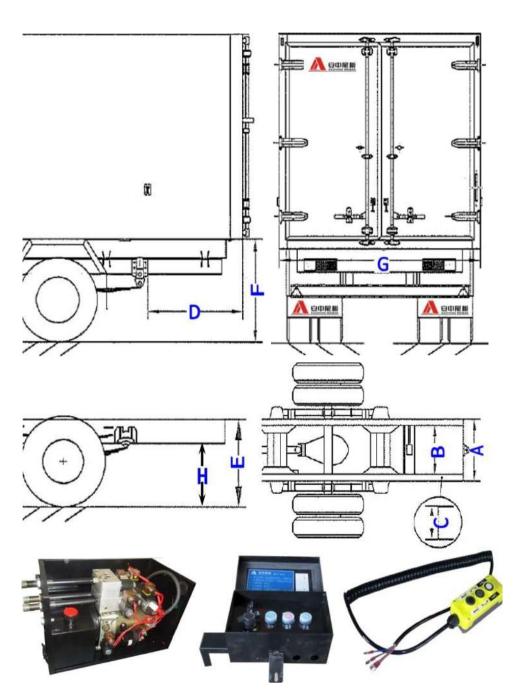



Style YZ-LZ-15-2 Load capacity 1500 kg

Lifting height 1450 mm

Board size 2336 1668 alloy, with roll stop

Lifting cylinder 2pcs Single acting cylinder 2pcs single acting cylinder

Auto tilt: Machnical

Powerpack Made in China

Control unit Control box + Liner control

Price


Requirments for installation

Automobile rear suspension D 11850 mm Height of truck floor F 1450 mm Width of beam A <870 mm Height from the beam to floor E >770 mm

Gross weight: 600 kg(with aluminum board)





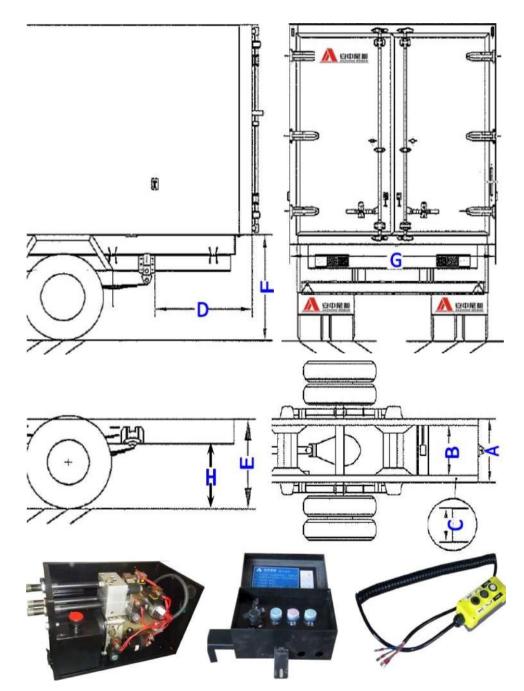



Style YZ-LZ-20-2 Load capacity: 2000 kg

Lifting height 1450 mm

Board size: 2336a1668 alloy, with roll stop

Lifting cylinder 2pcs Single acting cylinder Tilting cylinder: 2pcs sinple acting cylinder

Auto tilt: Machnical

Powerpack Made in China

Control unit Control box + Liner control

Price

Requirments for installation

Automobile rear suspension D 11850 mm
Height of truck floor F < 1450 mmWidth of beam A 870 mm
Height from the beam to floor E = 770 mm

Gross weight: 630 kg(with aluminum board)